

 Sourcetec
ROTARY AIRLOCK



*The future is clean air ... the future is **Sourcetec**[®]*



- Sourcetec Rotary Airlocks are designed to efficiently transfer non-stringy materials from one air system component to another.
- Maintains a tight positive air seal using flexible neoprene steel backed wipers in full contact with the interior housing at all times.
- Made with heavy-duty mild steel with a minimum thickness of 10 gauge.
- Fully welded and comes complete with heavy duty flanges and flange bearings.
- All units are protected with Sourcetec's specialized coating.

DIMENSIONS & SPECIFICATIONS

Figure 1.1: Rotary Airlock

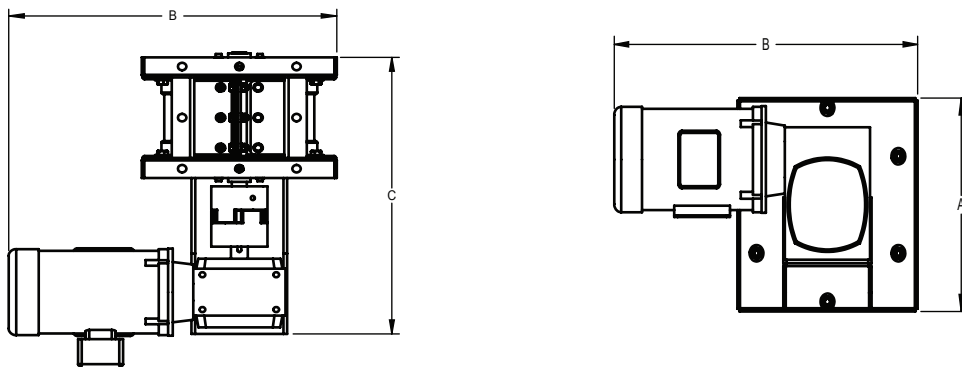


Table 1: Rotary Airlock

SIZE	RPM	HP	CAPACITY (FT ³) PER REVOLUTION	DIMENSIONS(INCHES)		
				A	B	C
6	29	3/4	0.25	11	21-1/2	20
10	29	1	1.07	17	24-1/2	26
14	29	1-1/2	1.85	20	26	30
18	22	1-1/2	4.30	28	29-1/2	34
24	18	2	12.70	40	36-1/2	42

*Above dimensions are for reference use only. For precise dimensions please consult the factory.

**Other sizes are also available upon request.

Distributed by:



The future is clean air ... the future is **Sourcetec**®

We reserve the right to change specifications without notice.

Sourcetec Industries Inc.

Ontario, Canada

Tel: (905) 678-9333 Fax: (905) 678-7133

1-800-784-2383

www.sourcetecindustries.com

E-mail: sales@sourcetecindustries.com